

### Wi-Fi Dimming LED driver & App wireless control network connecting solution(Setting steps)

(NOTE: Suitable for mobilephone with IOS & Android & HarmonyOS system)

#### ➤ How to use Wi-Fi control the Wi-Fi dimmable LED driver dimming by APP ?



Step 1: Download “Smart Life” App or “Tuya Smart” App

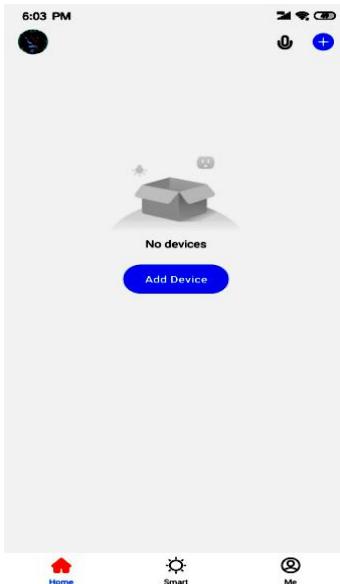


Figure 1.1



Step 2: After entering the app, register the account and click

“Add Device” button (please confirm the signal type of the router is 2.4GHz WIFI to add the device). (See figure 1.1) .

Step 3: Enter the Menu interface. (See figure 1.2).

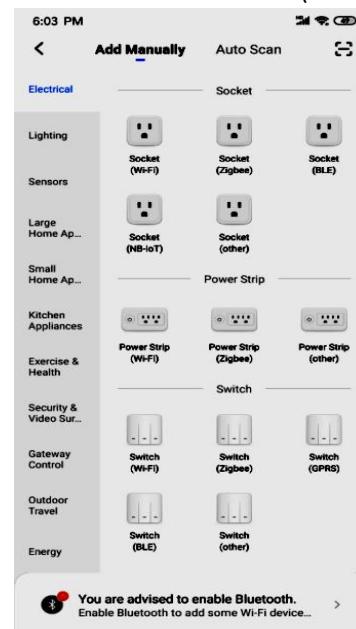


Figure 1.2



Step 4: after clicking the option (Lighting) on the left category bar, you can find the light source, Click the button

“Light Source (Wi-Fi)” on the up of this group. (See figure 1.3)

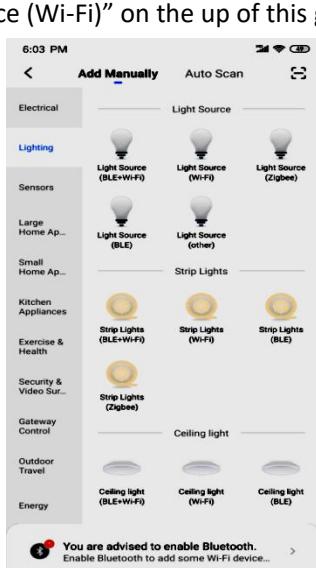


Figure1.3

Step 5: Select the 2.4ghz Wi-Fi network with strong signal and enter the password, then click“Next”,

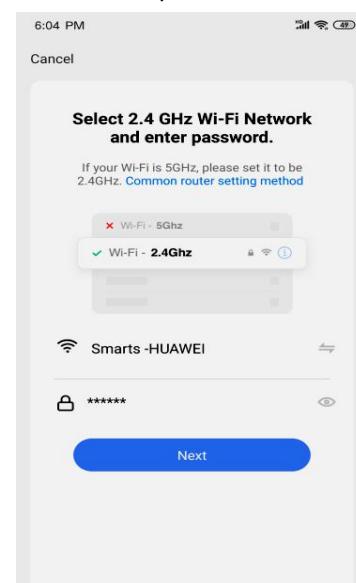


Figure1.4

**Step 6:** Go to the settings page (See figure 1.5)  
and follow the setup requirements step by step.

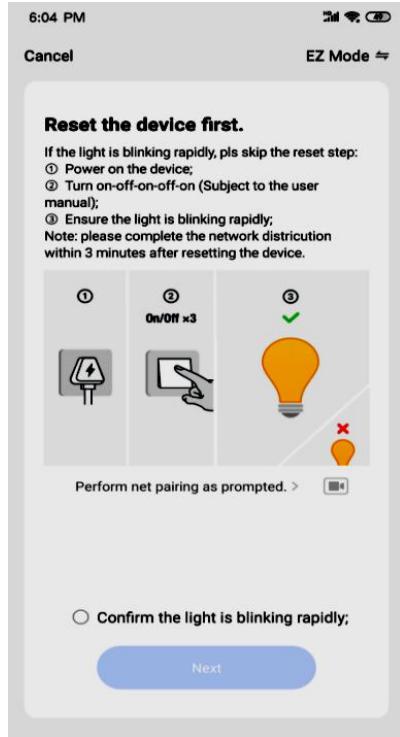


Figure 1.5

**Step 7:** Reset the device.

- 1) First, be sure the input and output terminals are well connected. (See figure 1.6)



Figure 1.6

2) Restart the power switch 5 times (ON/OFF 5 times) to reset the device. After confirming the light flashing quickly, check the button “confirm the light is blinking rapidly” (See figure 1.7).

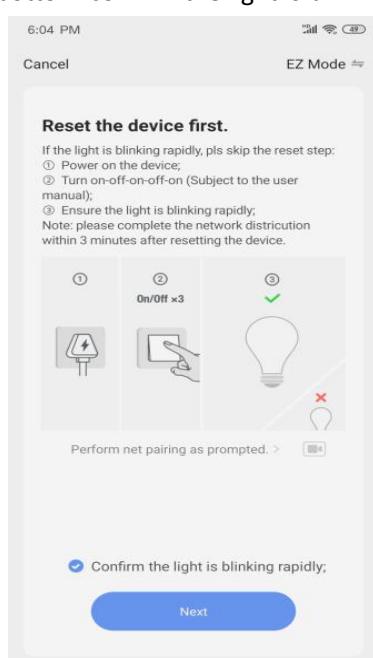


Figure 1.7

3) Click the “Next” button to add the device. (See figure 1.8).

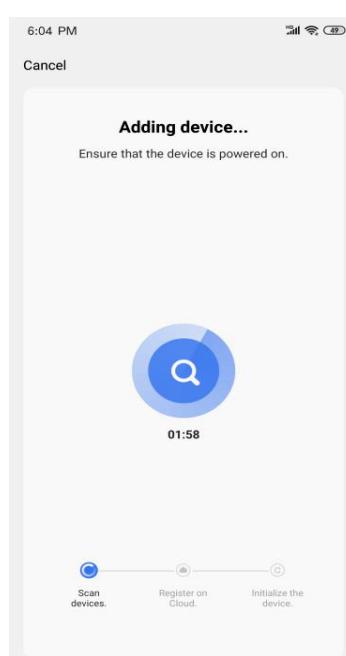


Figure 1.8

(Tip: Pl. complete the network connecting operation in 3 minutes).

3) Then you can successfully added the device, as shown in figure 1.9

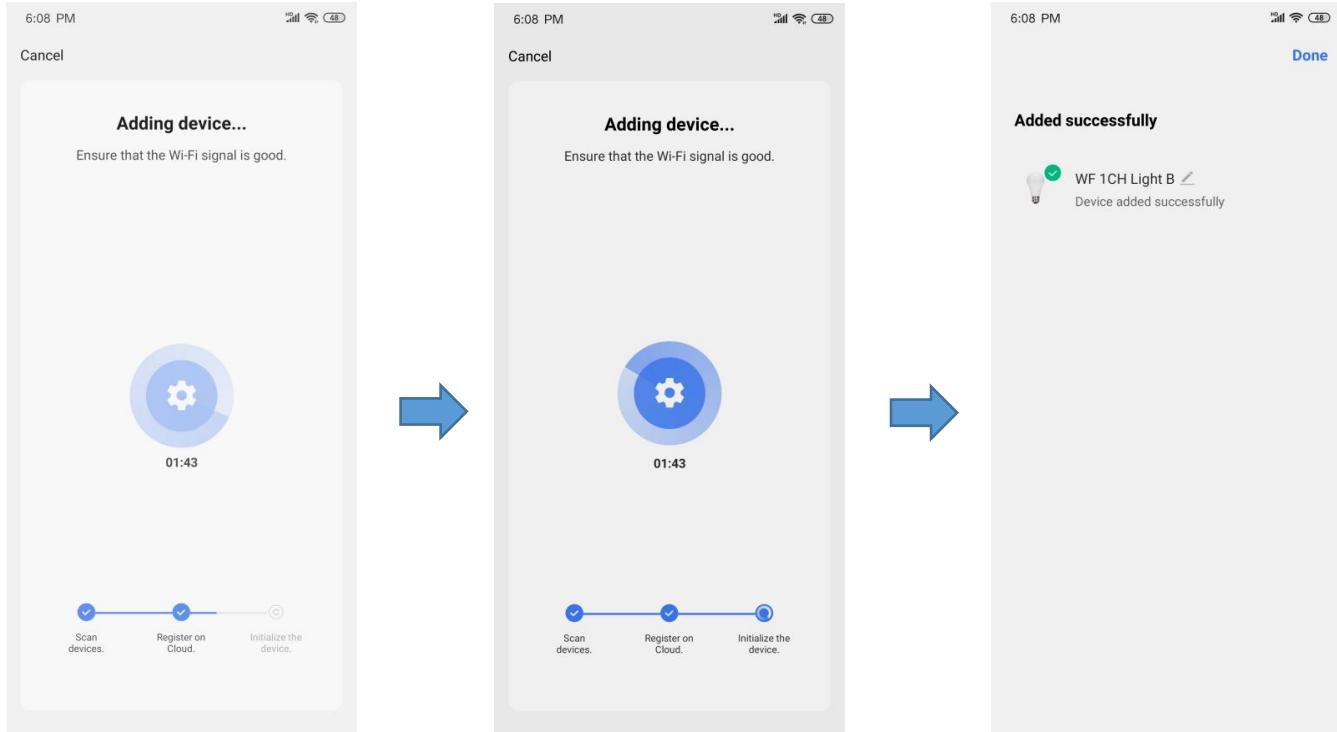


Figure 1.9

#### Step 7: Set up Wi-Fi Lights

(1) Click "Done" to enter the "WF \*CH Light B" platform, then click "White" to Control interface by default and 0-100% brightness dimming and switch ON/OFF the light at the bottom. (see figure 2.0),

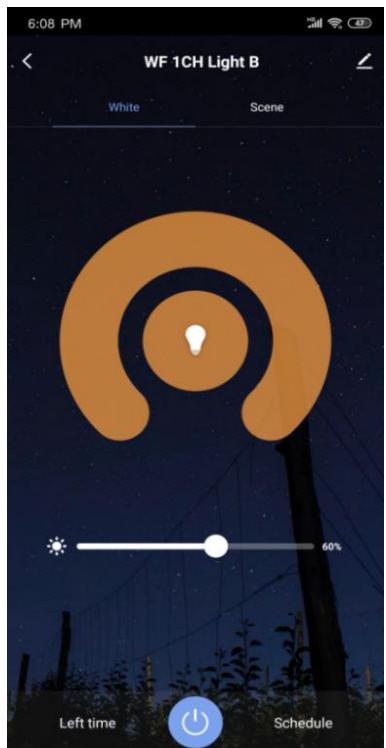


Figure 2.0

(2) Click "Scene" Interface, you can choose the lighting effects in different scenes, or you can add new scenes and customize the lighting effects as you wish. (See figure 2.1)

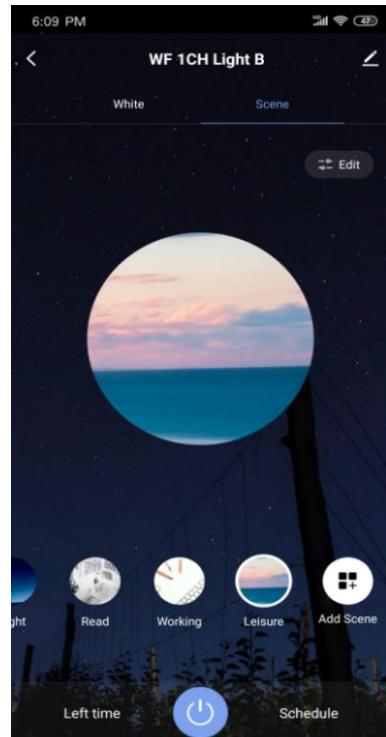


Figure 2.1

(3) Click the “Schedule” function on the right corner to setup

the Light ON & OFF in the fixed time. (see Figure 2.2)

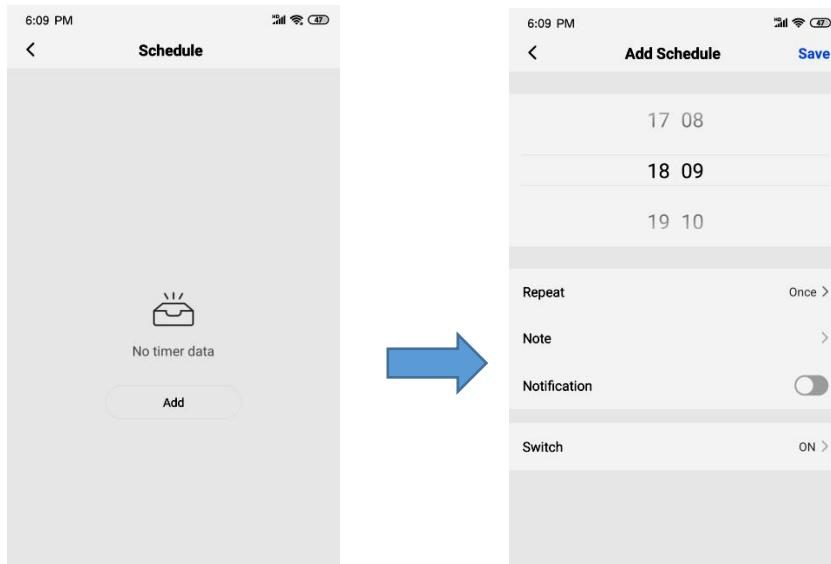


Figure 2.2

#### ➤ How to remote control the Wi-Fi dimmable LED driver dimming by APP ?

The same setting steps as above, but turn off your Wi-Fi, you can use your cell-phone signal to remote control the Wi-Fi dimmable led driver & the Lights.

#### ➤ How to set Wi-Fi dimming controlled by smarts speaker?

Step 1: Click the right up corner and enter the setting platform. (see figure 2.3)

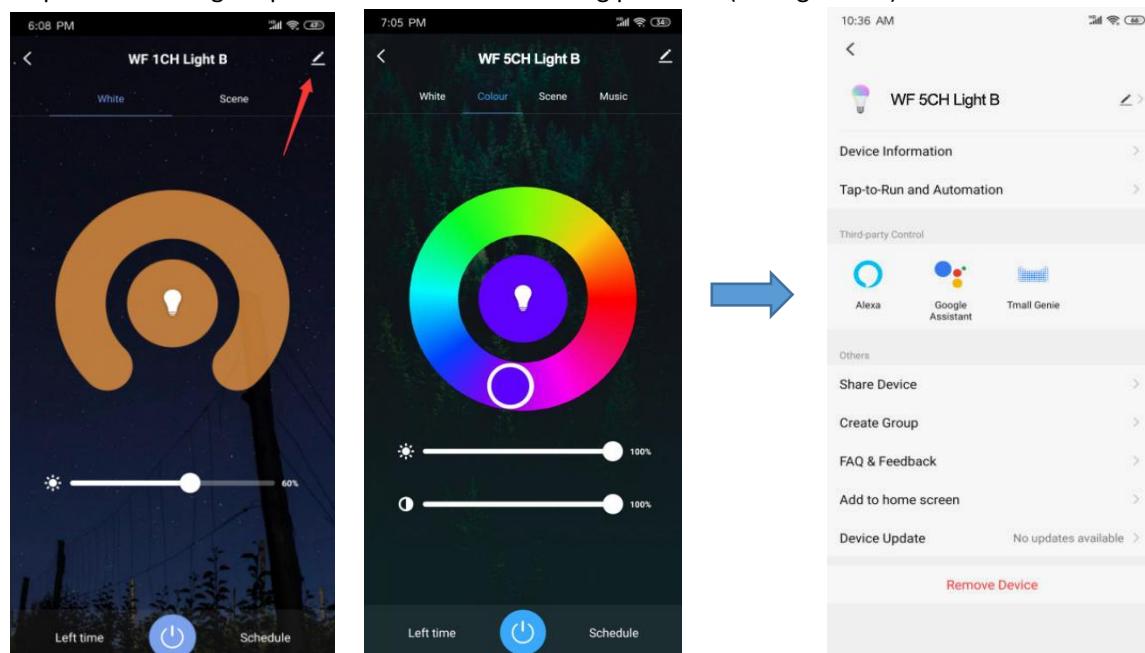


figure 2.3

Step 2: Select thire party control: Alexa, Google Assistant, Tmall Genie

1) Amazon Alexa smart speaker setting: (see figure 2.4)

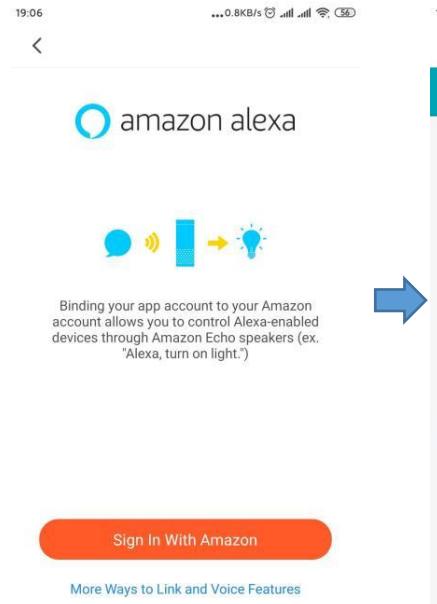


Figure 2.4

2) Google Assistant smart speaker setting: (see figure 2.5)

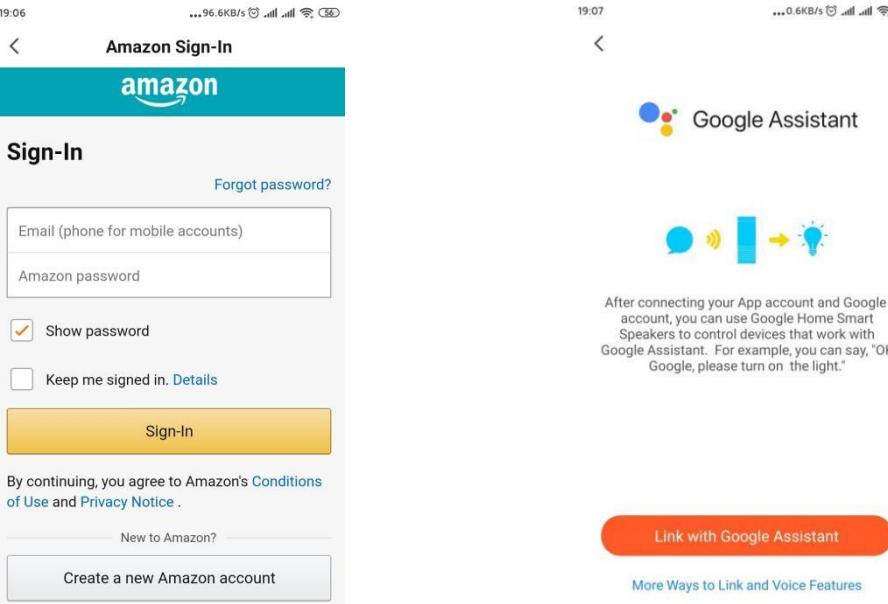


Figure 2.5

**Tip:** When register to the third party and sign-in, you will realize the smart speaker to control the LED lights.

**Note:** 1) Pl. Don't hesitate to contact us if you have any question.

2) For more wireless dimmable type LED drivers, pl. Login our Official website to know more about us.

[www.swinpower.com](http://www.swinpower.com) or [www.smartspower.com](http://www.smartspower.com)